
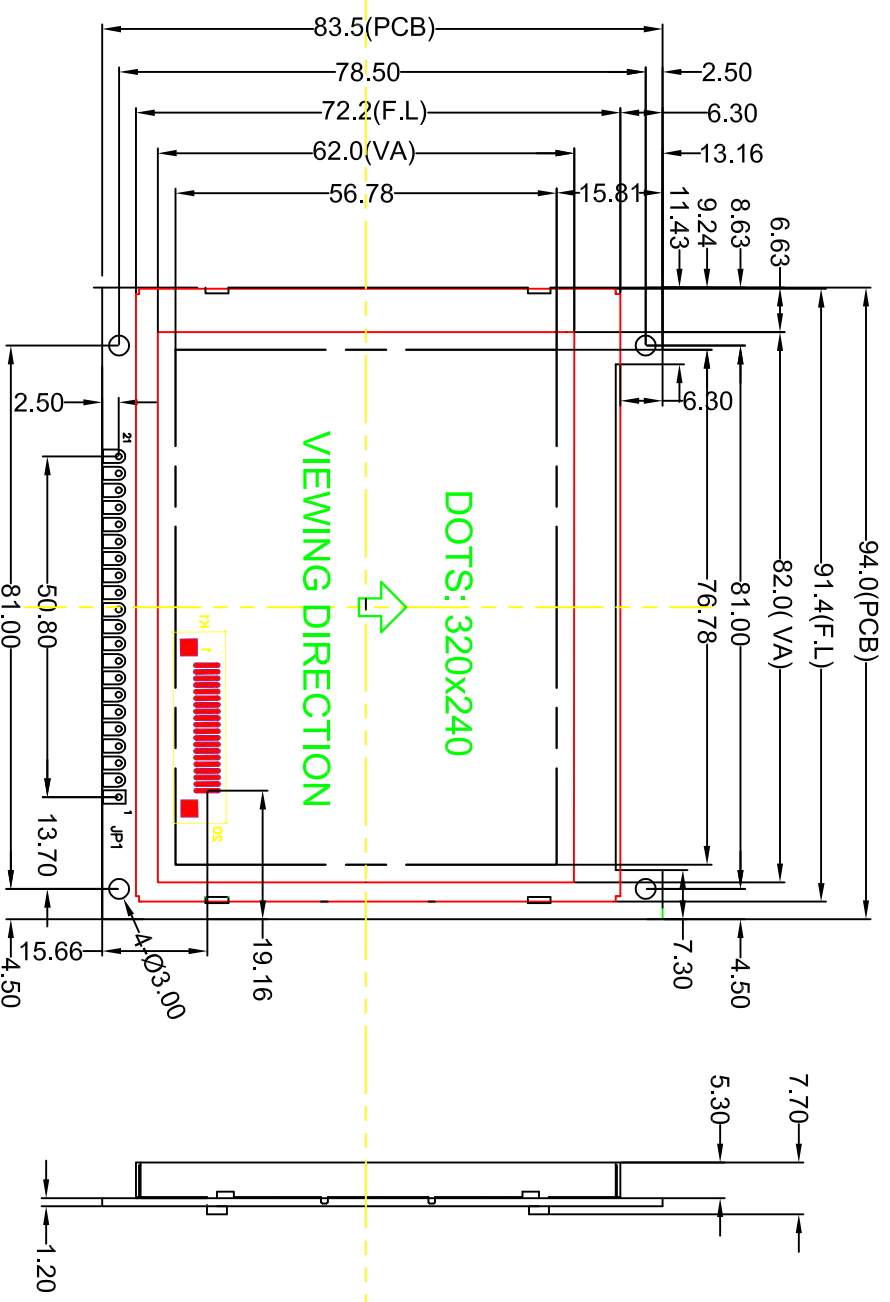





Customer approval :

CIRCUIT DIAGRAM



Specification:

- 1). Driving: Duty:1/240, Bias:1/17, Vout:25.3V, V0:23.3V, VDD:5.0V.
- 2). Viewing direction: 6 o'clock
- 3). Display mode: FSTN/B-W/ Transflective/Positive
- 4). Operating temp: -20°C~+70°C
- 5). Storage temp: -30°C~+80°C
- 6). Control IC: RA8835P3N-NE (Or Compatible)
- 7). Backlight: Edge White LED: 5.0V 90MA
- 8). dimensions with mark "\*" are important with mark "(") are referenced
- 9). All the raw materials are RoHS compliant



CONNECTION	1	2	3	4	5	6	7	14	15	16	17	18	19	20	21
JP1	SEL1	/RST	/RD	/WR	AO	/CS	DB0	~DB7	VDD	VO	VOUT	VSS	BLK	BLA	BL-E
K1	VSS	VDD	VO	/WR	/RD	/CS	AO	/RST	DB0	~DB7	NC	VOUT	BLA	BLK	
								8	9	16					



深圳市三元晶科技有限公司  
ShenZhen TCC LCD HI-Tech Co., Ltd.

REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	PAGE:	UNIT:
A	FIRST ISSUE	2015/11/03	模组型号	审核	绘图	未注公差	mm
B			SYG320240E2V/12-5C2K3LN6R-69WC	检查	Luoxian	1 OF 1	
C							
D							

