


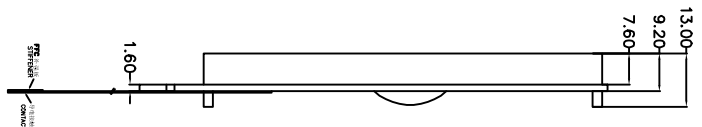


Customer approval :

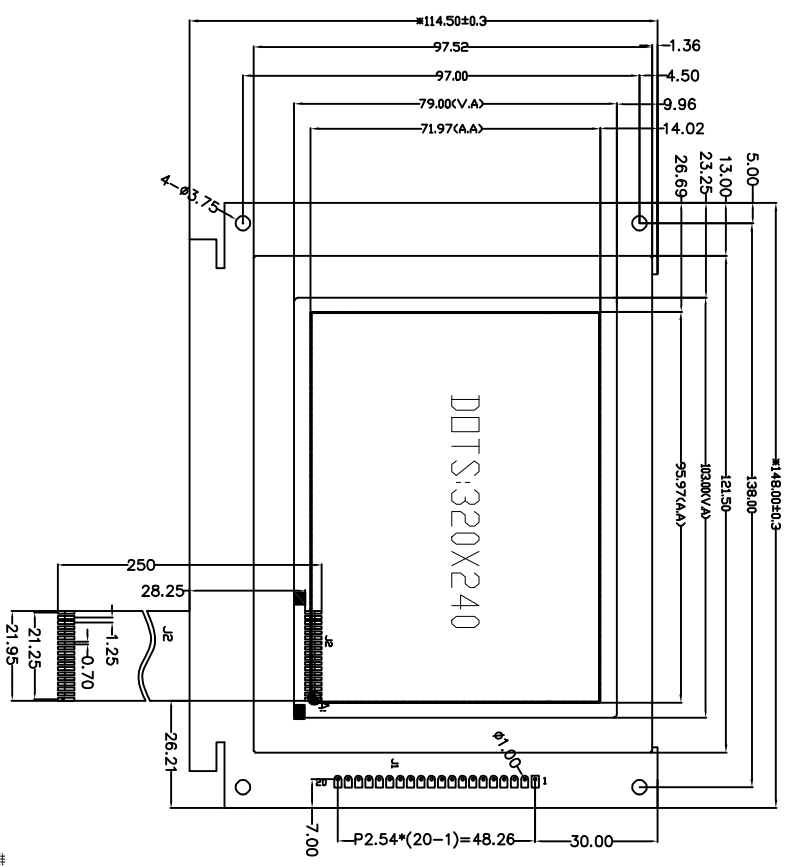

SPECIFICATION:

- 1). Driving: Duty:1/240, Bias:1/16, VOUT:-19.5V, VO:-13.5V, VDD:5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20° C~+70° C
Storage temp.: -30° C~+80° C
- 5). Control IC: RA8835AP3N
- 6). BACKLIGHT Type: White
- 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT
WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

带控接口

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
GND	VCC	VO	WR	RD	/S	AO	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC	VOUT	BLA	GND

不带控接口

1	2	3	4	5	6	7	8	9	10	11	12	13	14
FLM	CL1	CL2	M	VO	VCC	GND	VOUT	DO	DI	D2	D3	DISP	FAND

J2

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
FLM	CL1	CL2	NC	DISP	DO	DI	D2	D3	VDD	VSS	VO	BLA	BLK	NC	NC	NC	NC

REV	REVISION RECORD	DATE	MODEL NO.		CHECKED BY		DRAWING BY		GENERAL TOL:	
A	First issue	4/10	模组型号	SM13202403V1C-5C2B1N18e-B5N1F-25	检查	审核	绘图	公差	± 0.3	
B			APPROVED BY		Francis		Luoxian	PAGE: 1 OF 1	UNIT: mm	
C			Liu	2012/04/10	2012/04/10			PROJECTION	三角法	
D										

深圳市三元晶科技有限公司
Shenzhen TCCLCD Hi-Tech Co., Ltd.